



CHILLER 45



ABOUT THE CHILLER

The Chiller 45, which provides a reduced footprint, lower power usage and is Eurovent certified, is part of a 10 model range capable of offering between 1kW and 50kW of cooling.

The chillers all contain a circulation pump and thermal buffer tank capable of receiving variable load conditions and providing stable return temperatures.

The units can be supplied with ferrous or non-ferrous circuit, together with a wide range of connecting valves and hoses to help connect on to customers specific systems.

The ranges have been designed to help provide cooling for the following uses:

- R&D testing for long or short term trials
- Plastics and Rubber production
- Food storage and packaging
- Laser applications
- Jacketed vessels and tank cooling
- Air compressor cooling

THE ICS COOL ENERGY PORTFOLIO

ICS Cool Energy can also supply the following equipment:

- Air-cooled rental chiller range from 0.3kW – 1,000kW units.
- Water-cooled rental chiller range from 7.5kW – 1,000kW units.
- Air handling units & fan coils from 5kW – 500kW duties.
- Air conditioning units from 1.3kW – 350kW units.
- Low temperature chillers (-40°C) and fan coils (0°C air off).

- Dehumidifiers (desiccant & electric) 200-10,000m³/hr.
- Generator Power with 20KVA – 800KVA, fuel tanks and management.
- Air distribution (flexible ducting and perforated air socks).
- Hot water generators and boilers from 25kW – 500kW units.
- Heating (office/warehouse) from 3kW to 200kW electric/indirect/heat pump.

We also provide full installation, transportation, lifting and monitoring.

CONTACT

Bel ons op
+31 (0)88 - 258 2580 of
bezoek onze website
www.icscoolenergy.nl

info@icscoolenergy.nl

All data is subject to change and continuous improvement without notice

© ICS Cool Energy. All rights reserved.

THE TEMPERATURE CONTROL SPECIALISTS.
VERHUUR. VERKOOP. SERVICE.

WWW.ICSCOOLENERGY.NL



ics cool energy

CHILLER 45

Chiller (LxWxH)	2,250 x 770 x 1,650
Stacking Frame (LxWxH)	2,260 x 805 x 1,780
Weight kg	844
Water hoses	2" Bauer coupling
Cooling Capacity kW	43.6
Compressor (Scroll)	1
Refrigerant (Zero ozone depletion potential) HFC	R 407 C / 410A
Fluid Flow m ³ /h min/max	3.2/18
Pump Pressure Bar max/min	2.8/1.7
Tank l	225
Delta T min/max K	4-10
Max Working Pressure Bar	6
Max Power Absorbed kW	21
Electrical Supply Voltage Phase V	400
Max Current Absorbed A	37
Chiller Power Connections	CEE 63 amp
Sound Pressure Level	55.0

CONTACT

Bel ons op
+31 (0)88 - 258 2580 of
bezoek onze website
www.icscoolenergy.nl

info@icscoolenergy.nl

All data is subject to change and
continuous improvement without notice

© ICS Cool Energy. All rights reserved.


**THE TEMPERATURE CONTROL SPECIALISTS.
VERHUUR. VERKOOP. SERVICE.**

WWW.ICSCOOLENERGY.NL



TECHNICAL CHILLER 45

CHILLER 45

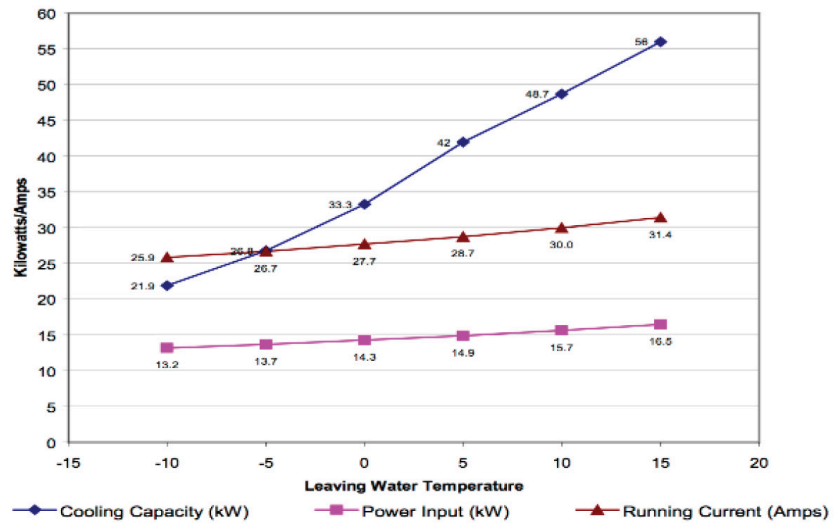

SOUND LEVELS

Measurements are taken in accordance with the standard ISO 3744.

Sound pressure average value obtained in free field on a reflective surface at a distance of 10m from the longer side of the machine at a height of 1.6m +/- 2 under full load in normal conditions.

For measurements closer than 10m add the following: 5m +6, 3m +10 and 1m +15

OCTAVE BANDS (H3)								SOUND PRESSURE
63	125	250	500	1000	2000	4000	8000	
SOUND POWER LEVEL dB(A)								dB(A) 10m
51	49	52	56	57	48	36	29	54.0

Additional Services: ICS Cool Energy can provide attenuated equipment and services to help further reduce the impact of our equipment to help meet your specific site requirements.

SUB 5°C WATER APPLICATIONS

When installing a chiller and/or air handling piece of equipment, we would recommend the use of the following mix of Glycol for the systems total volume of fluid. This will protect the equipment against internal freezing and failure (e.g. 200 litre volume @ 0 °C foodsafe equals 30 litres of Glycol and 170 litres of water). Weekly checks should be made by the site maintenance engineer/manager to ensure the correct mix is present in the system.

Water Temperature			5 °C	0 °C	-5 °C	-10 °C	-15 °C
Industrial Grade	Mono Ethylene Glycol	% Mix	5	10	20	25	30
Foodsafe Grade	Mono Propylene Glycol	% Mix	10	15	20	25	30
Bio Foodsafe Grade (made from vegetable extracts)	Biodegradable Glycol	% Mix	10	15	20	25	30

Glycol can be purchased from ICS Cool Energy in 25 litre, 205 litre and 1,000 drums.

CONTACT

Bel ons op
+31 (0)88 - 258 2580 of
bezoek onze website
www.icscoolenergy.nl

info@icscoolenergy.nl

All data is subject to change and continuous improvement without notice

© ICS Cool Energy. All rights reserved.

THE TEMPERATURE CONTROL SPECIALISTS.
VERHUUR. VERKOOP. SERVICE.

WWW.ICSCOOLENERGY.NL